


2 - 3/4" Dia Equip. Mtg Holes for 5/8" Dia Bolts

2 - 3/4" Dia Holes for Fdn Bolts

3/4" Dia Adj Bolt

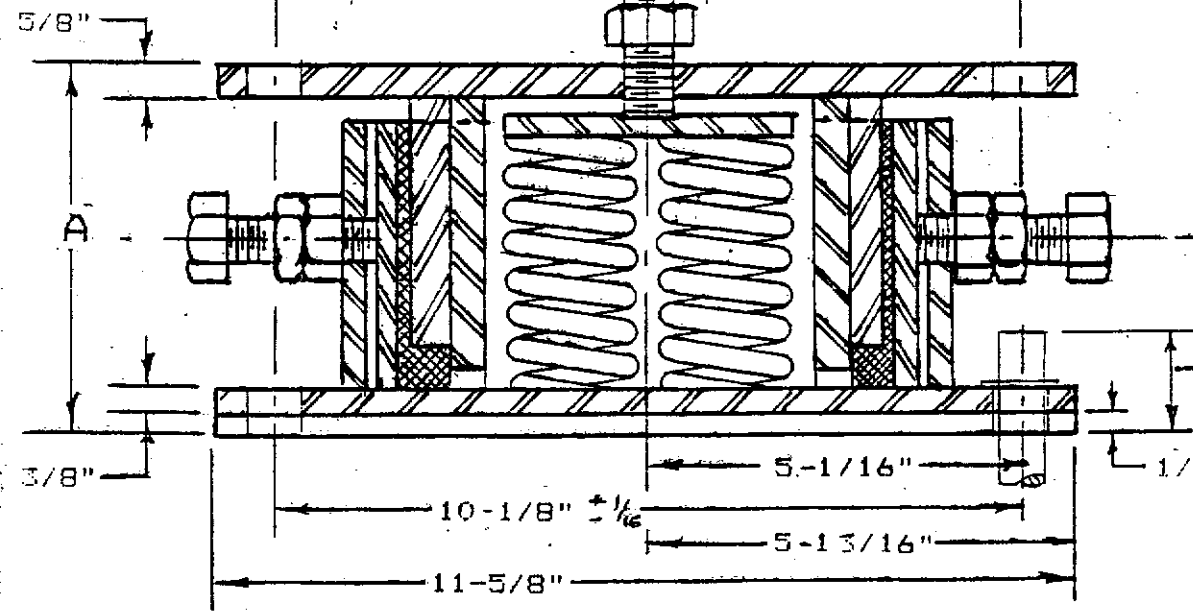

1-1/2" Max Proj of 5/8" Dia Fdn Bolts w/ Std Stl Washer & Heavy Jam Nut (by others)

1/4" Sound Pad

Min. Oper. Ht 5-1/4"
or Free Ht minus Oper Deflection
Whichever is Greater

ISOL. NO.	RATED LOAD		"A" MIN FREE HT.
	STEADY	IMPACT	
W K4-1	500	---	6 1/4
W K4-2	800	---	
W K4-3	1200	---	
W K4-4	2000	---	
W K4-5	2800	---	
W K4-6	4800	---	
W K4-S5	1300	1040	5-1/4
W K4-S6	1800	1440	
W K4-S7	2400	1920	
W K4-S8	4400	3300	
W K4-S9	5200	4900	

UNLESS INDICATED
DECIMALS ±
FRACTION ± 1/8"
ANGLES ±
RMS FINISH:
✓ MIL-STD-10
SCALE: NTS

ASSEMBLY
TYPE WK-4 COMBINED SNUBBER
VIBRO ISOLATOR

ISOLATION TECHNOLOGY INC.
P.O. BOX 460
MASSAPEQUA, N.Y. 11758

083189-5